



Linear High Bay Light



Function & Features


1 Use baking powder technology, increased corrosion resistance, looks shiny and will not be discolored. Suitable for harsh outdoor environments.

2 Aluminum material, perfectly heat dissipation.




3 End caps

4 Branded LED driver provides excellent performance and lifespan.

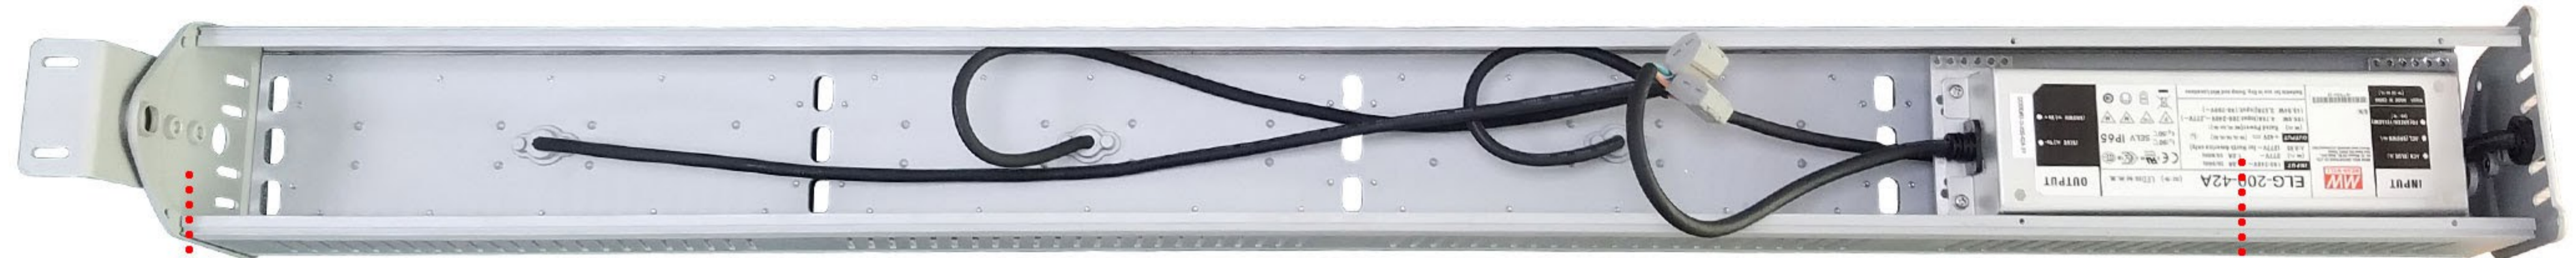

5 3D professional heat dissipation structure. Internal and external interlinked wind tunnel design, improved thermal performance and extend the life of the lamp greatly.

6 Wide adjustable angle. Screws lock mounting, brackets adjustable angle +/- 50 degree.

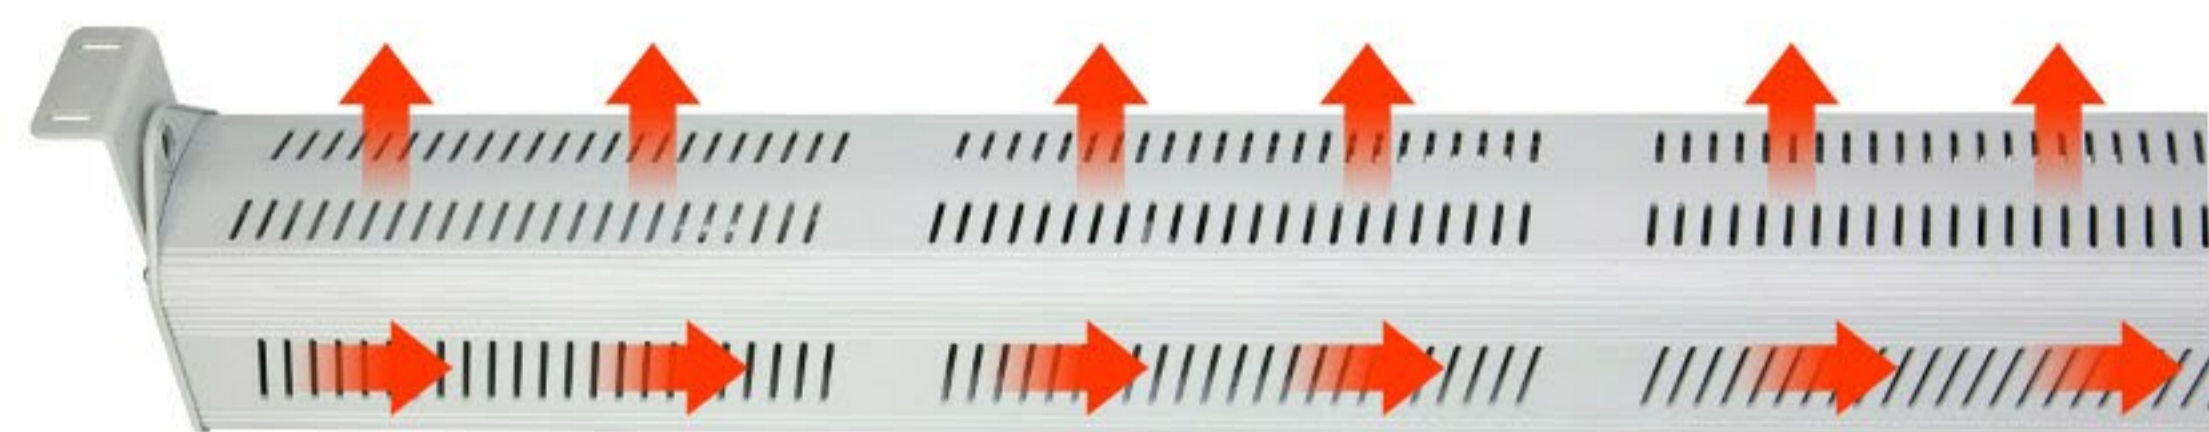

7 LED chips. Using well-known brands, more than 60000hrs lifetime.

8 Professional optical lens, multiple beam angles, can meet different requirements.



9 Hanging chain mounting/bracket mounting, suitable for various application places.




Technical Parameters


Model No.	BST56Z-F14A	BST112Z-F14A	BST168Z-F14A	BST224Z-F14A
Nominal Wattage	50W	100W	150W	200W
Input Voltage	AC100-305V 50/60Hz			
CCT	3000K / 4000K / 5000K / 5700K / 6500K			
CRI	75±5	75±5	75±5	75±5
PF	>0.95	>0.95	>0.95	>0.95
Luminaire Efficacy	≥100lm/W	≥100lm/W	≥100lm/W	≥100lm/W
Beam Angle	30°/60°/90°/30*70°/60*90°/60*120°/80*155°			
Life span	>50000Hours	>50000Hours	>50000Hours	>50000Hours
LED brand	Lumileds	Lumileds	Lumileds	Lumileds
Driver brand	Meanwell	Meanwell	Meanwell	Meanwell

Model No.	BST280Z-F14A	BST336Z-F14A	BST448Z-F14A	BST560Z-F14A
Nominal Wattage	250W	300W	400W	500W
Input Voltage	AC100-305V 50/60Hz			
CCT	3000K / 4000K / 5000K / 5700K / 6500K			
CRI	75±5	75±5	75±5	75±5
PF	>0.95	>0.95	>0.95	>0.95
Luminaire Efficacy	≥100lm/W	≥100lm/W	≥100lm/W	≥100lm/W
Beam Angle	30°/60°/90°/30*70°/60*90°/60*120°/80*155°			
Life span	>50000Hours	>50000Hours	>50000Hours	>50000Hours
LED brand	Lumileds	Lumileds	Lumileds	Lumileds
Driver brand	Meanwell	Meanwell	Meanwell	Meanwell


Beam Angle

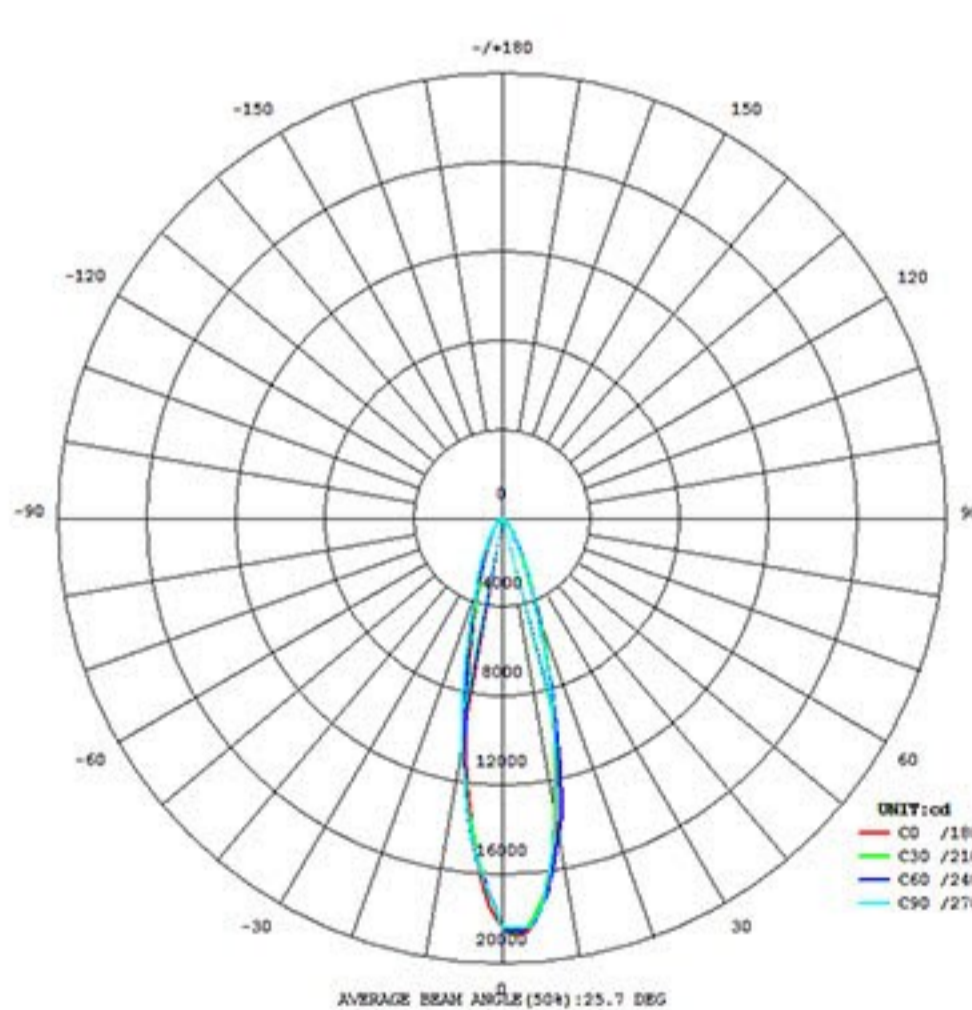


30°

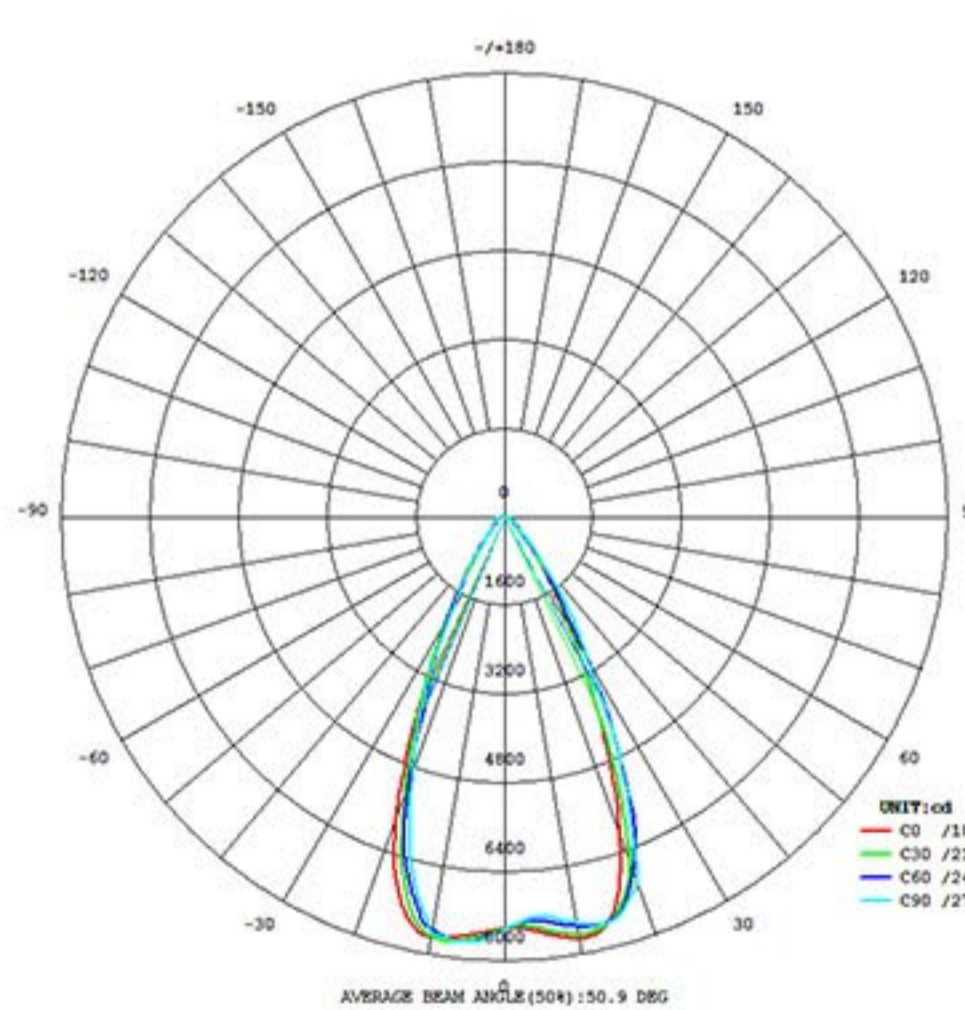


60°

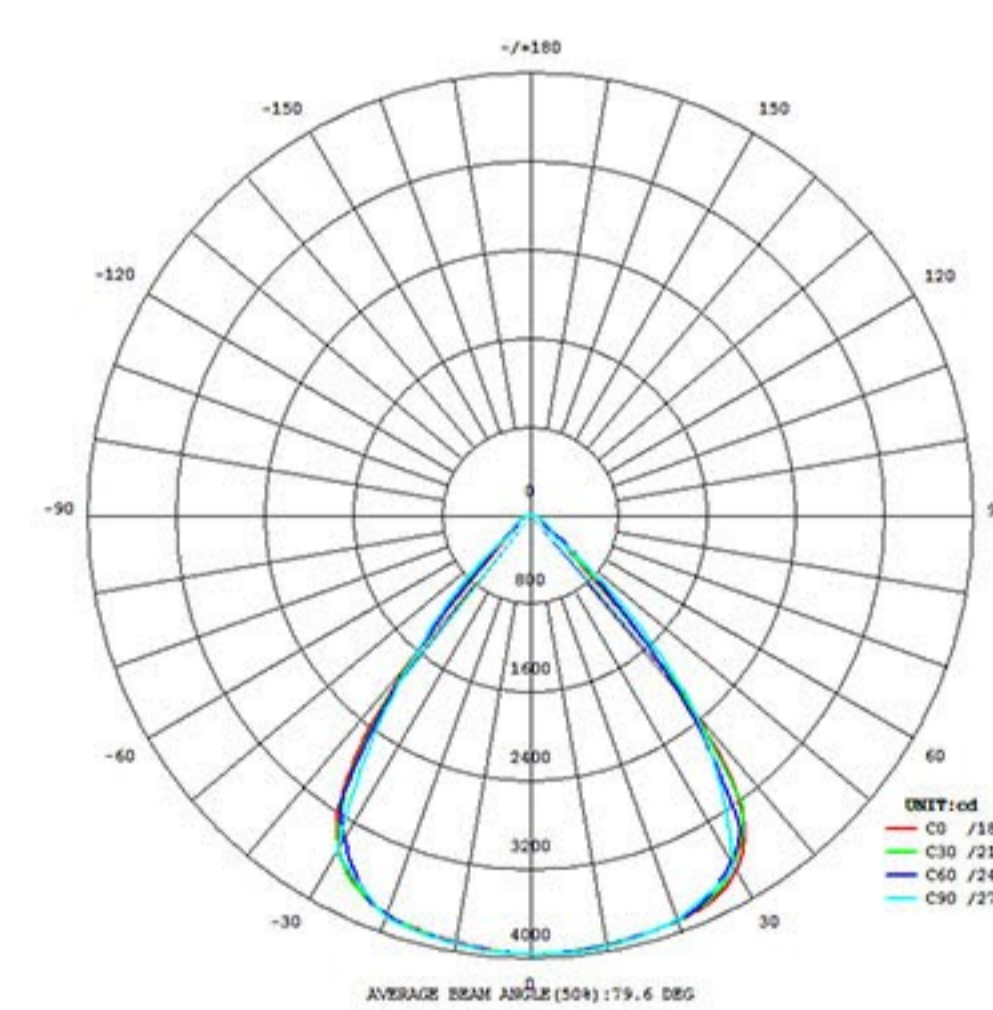

90°

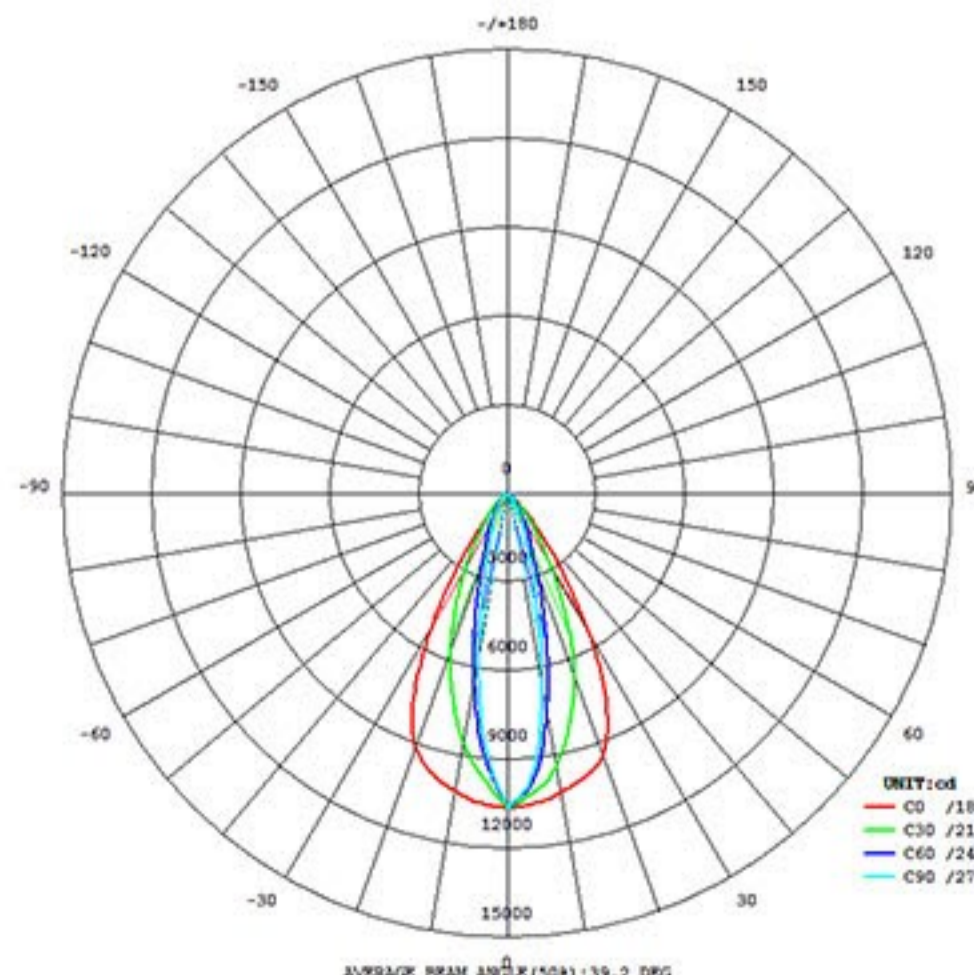


30°X70°

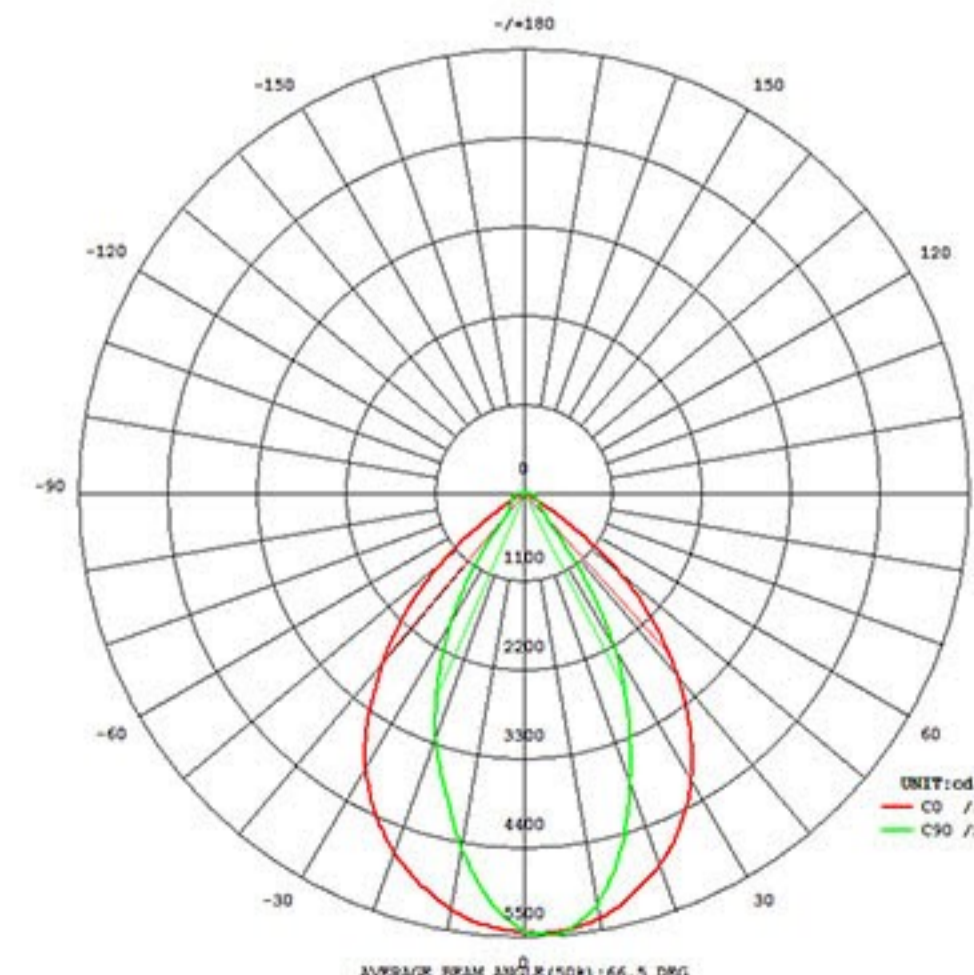


60°X90°

Beam Angle

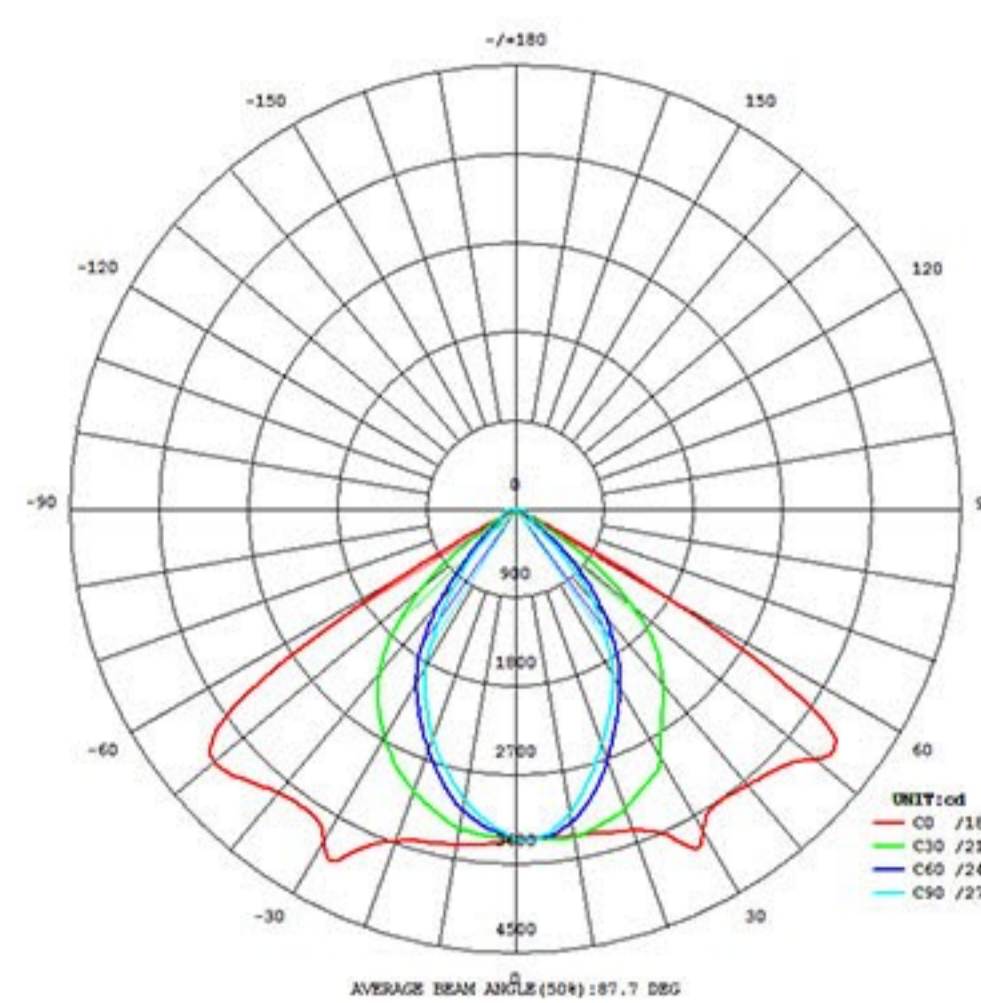


60°X120°

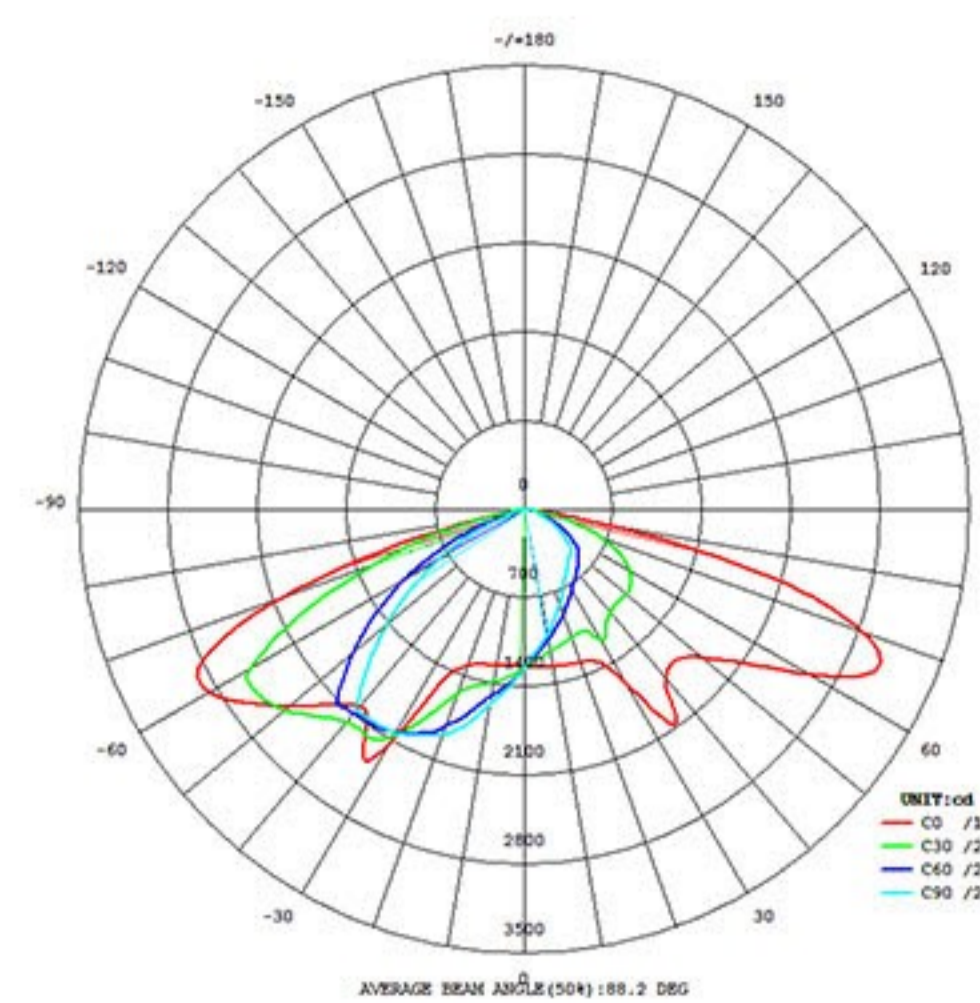


80°X155°

Product Size


MODEL	Lamp Size	Packing Size	N.W.	G.W.
BST56Z-F14A	353*115*144mm	385*165*195mm	2kg	2.5kg
BST112Z-F14A	620*115*144mm	655*165*195mm	3.5kg	4.5kg
BST168Z-F14A	887*115*144mm	920*165*195mm	4.5kg	6kg
BST224Z-F14A	1154*115*144mm	1185*165*195mm	5.5kg	8kg
BST280Z-F14A	1421*115*144mm	1450*165*195mm	6.5kg	9.5kg
BST336Z-F14A	947*230*173mm	970*280*220mm	9kg	12kg
BST448Z-F14A	1214*230*173mm	1240*280*220mm	11.5kg	15.5kg
BST560Z-F14A	1481*230*173 mm	1505*280*220mm	13kg	19kg

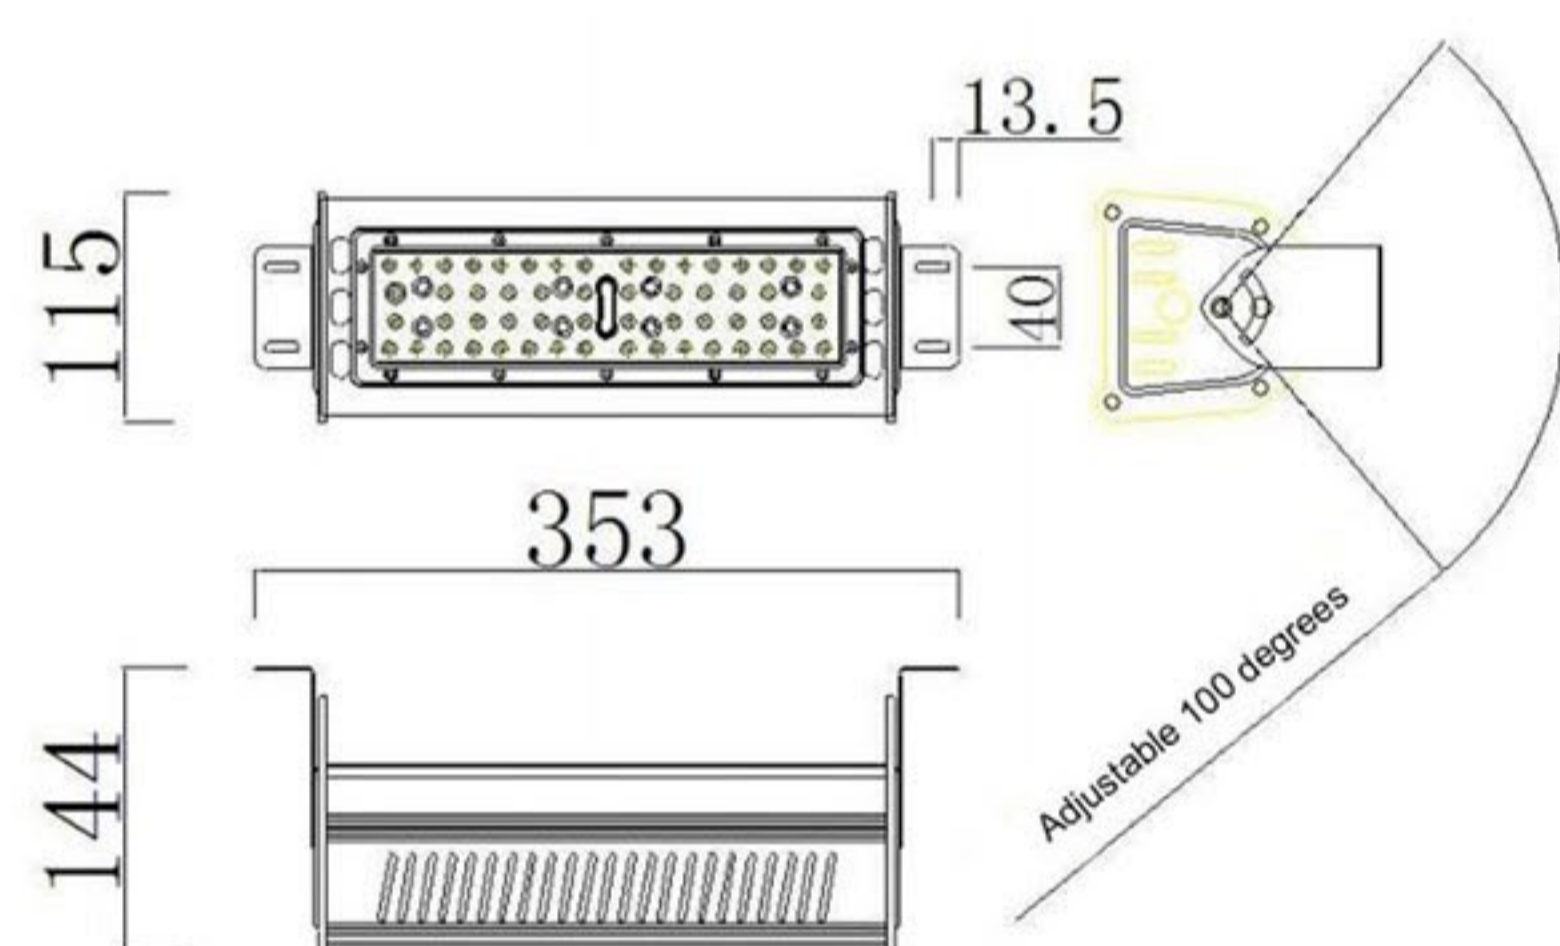


BST56Z-F14A

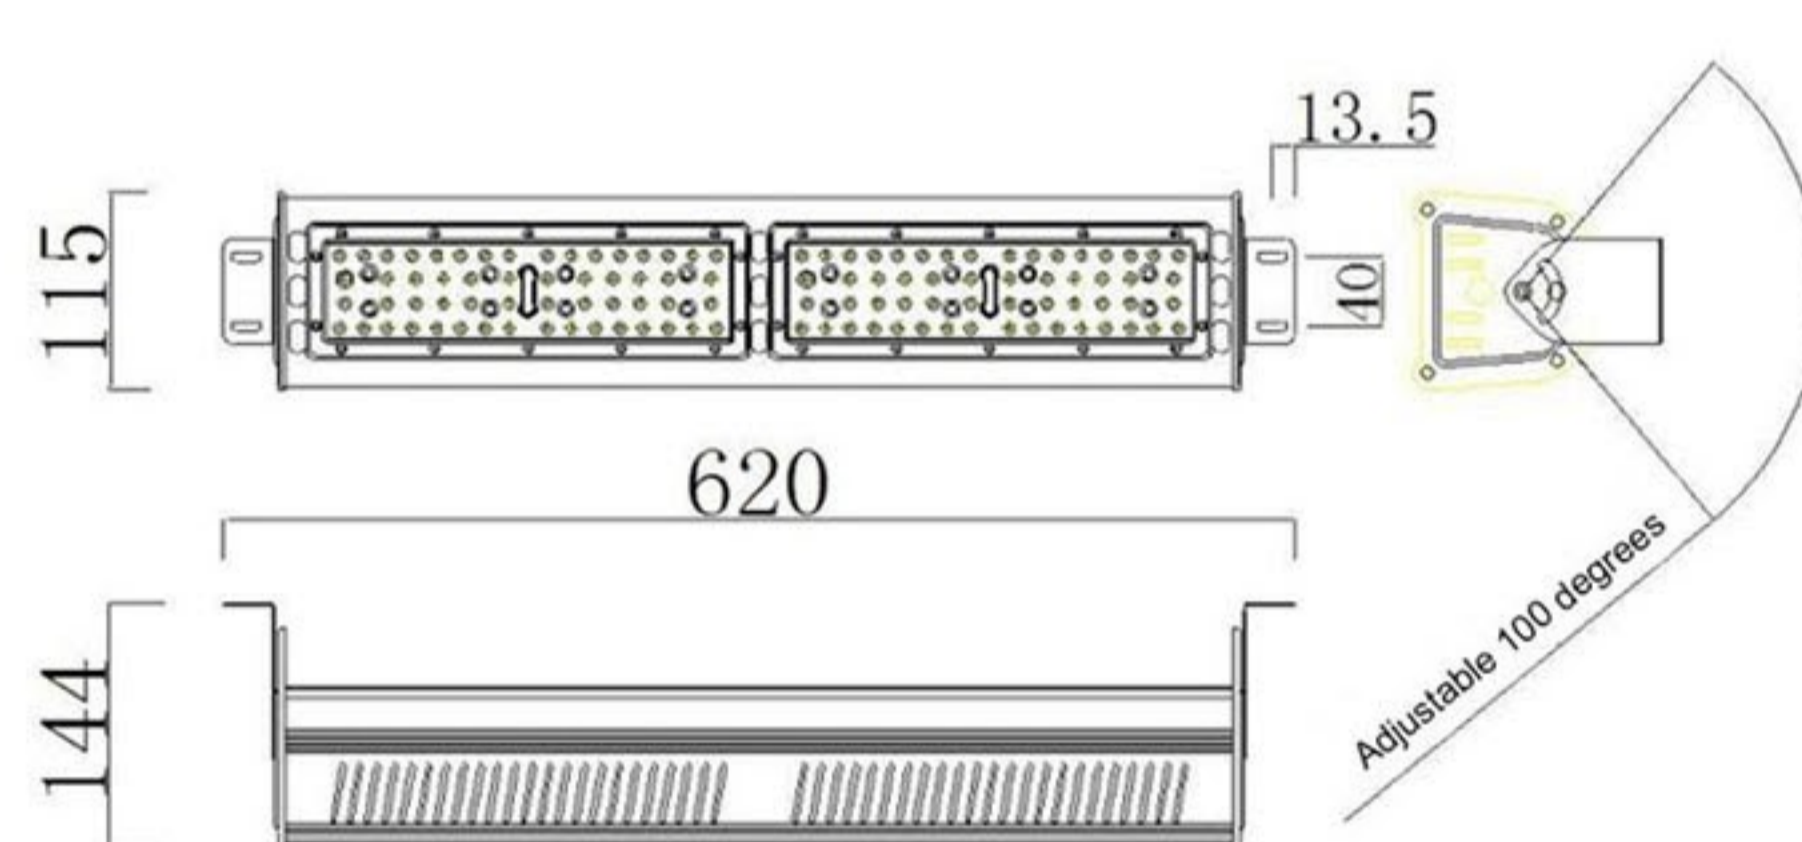


BST112Z-F14A

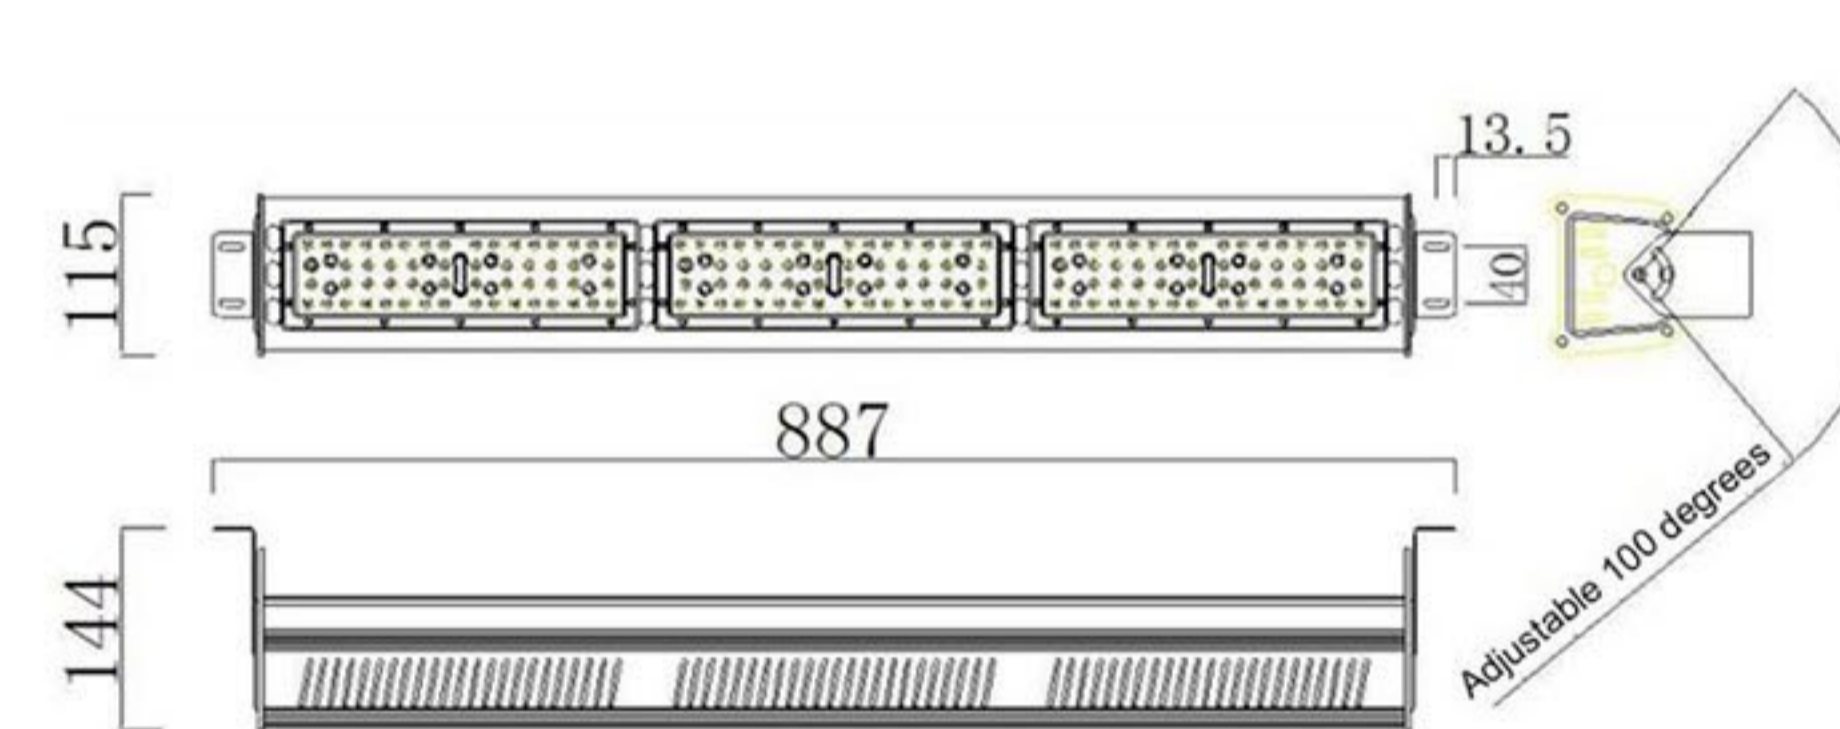


BST168Z-F14A

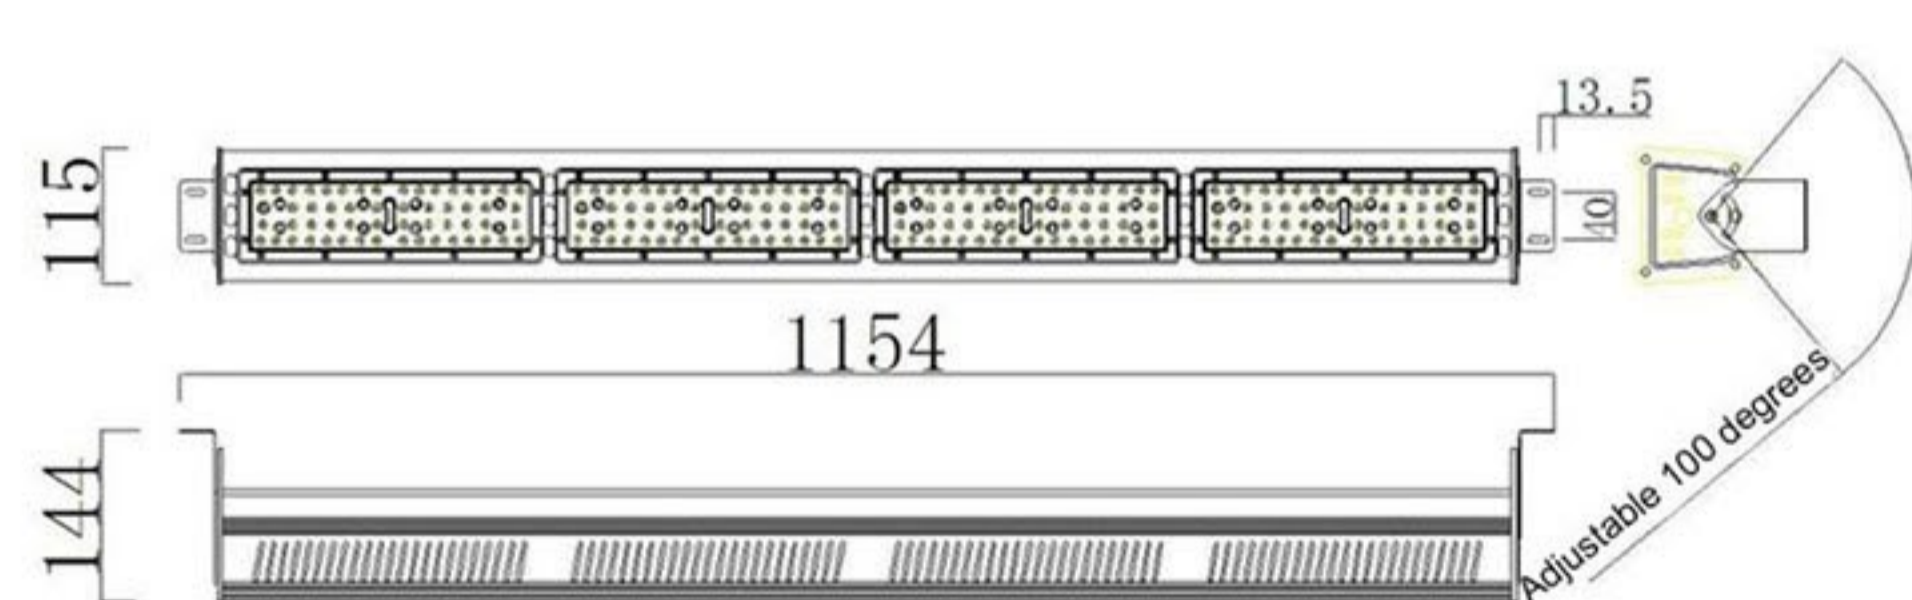


BST224Z-F14A

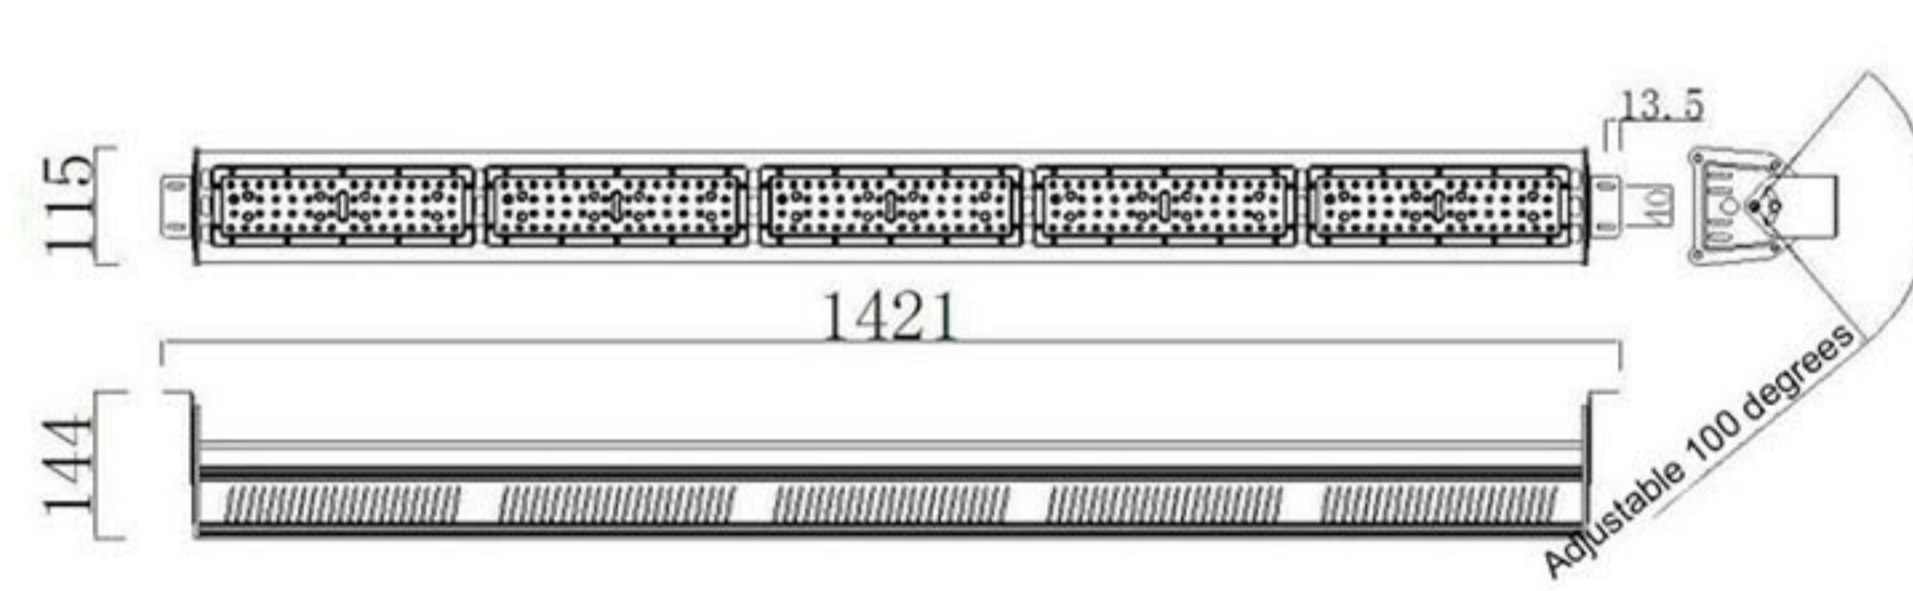


BST280Z-F14A

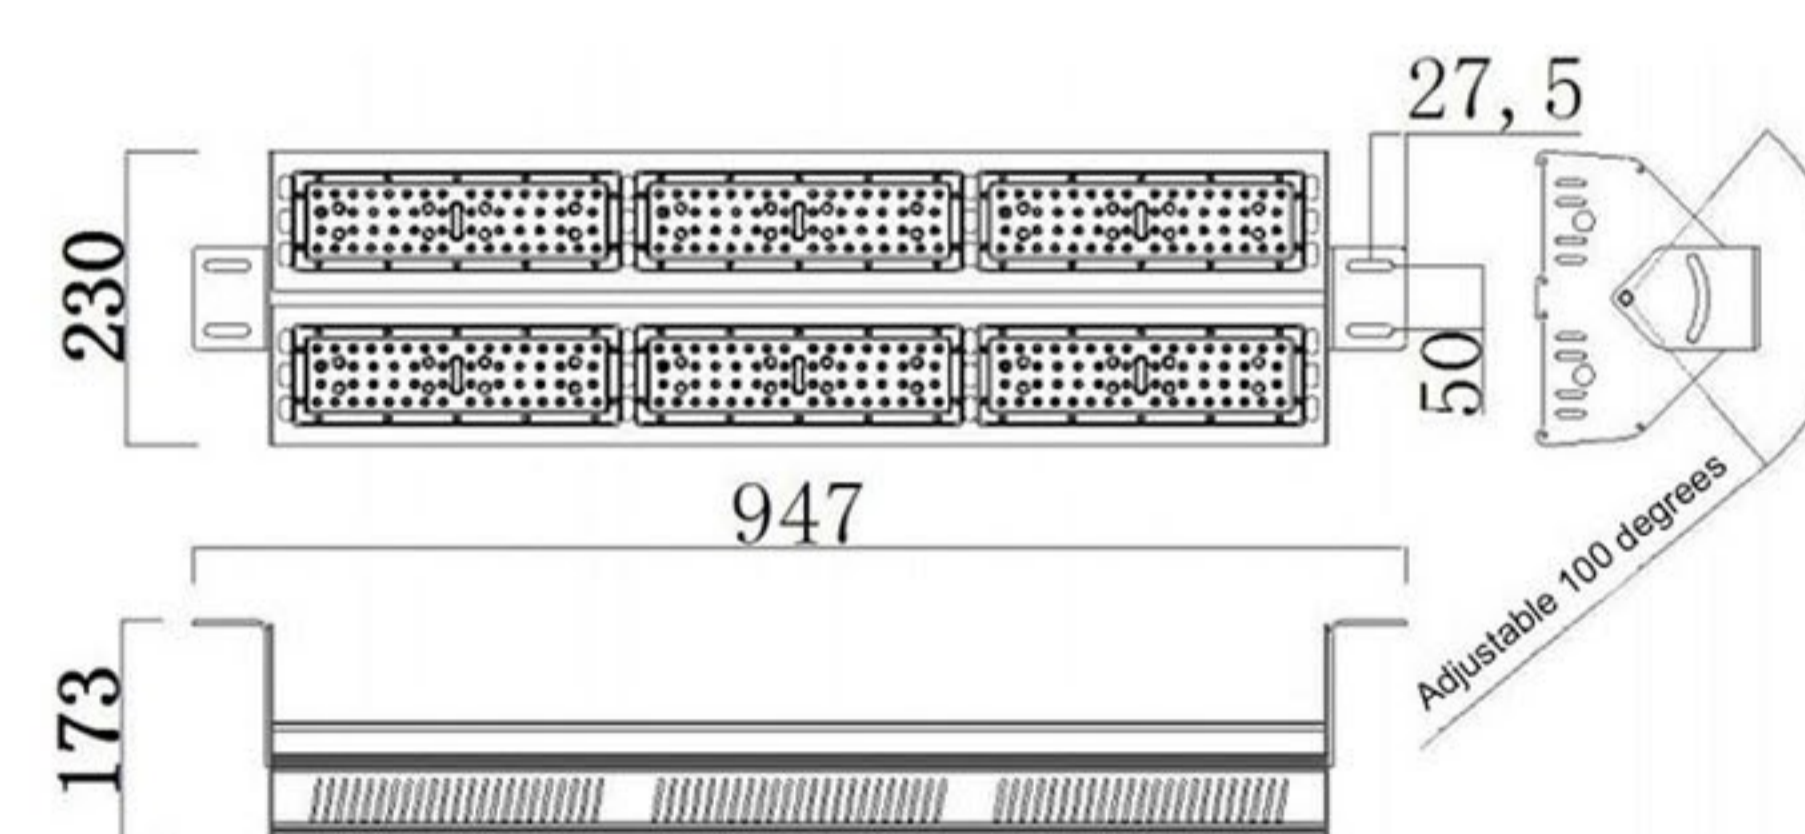

BST336Z-F14A

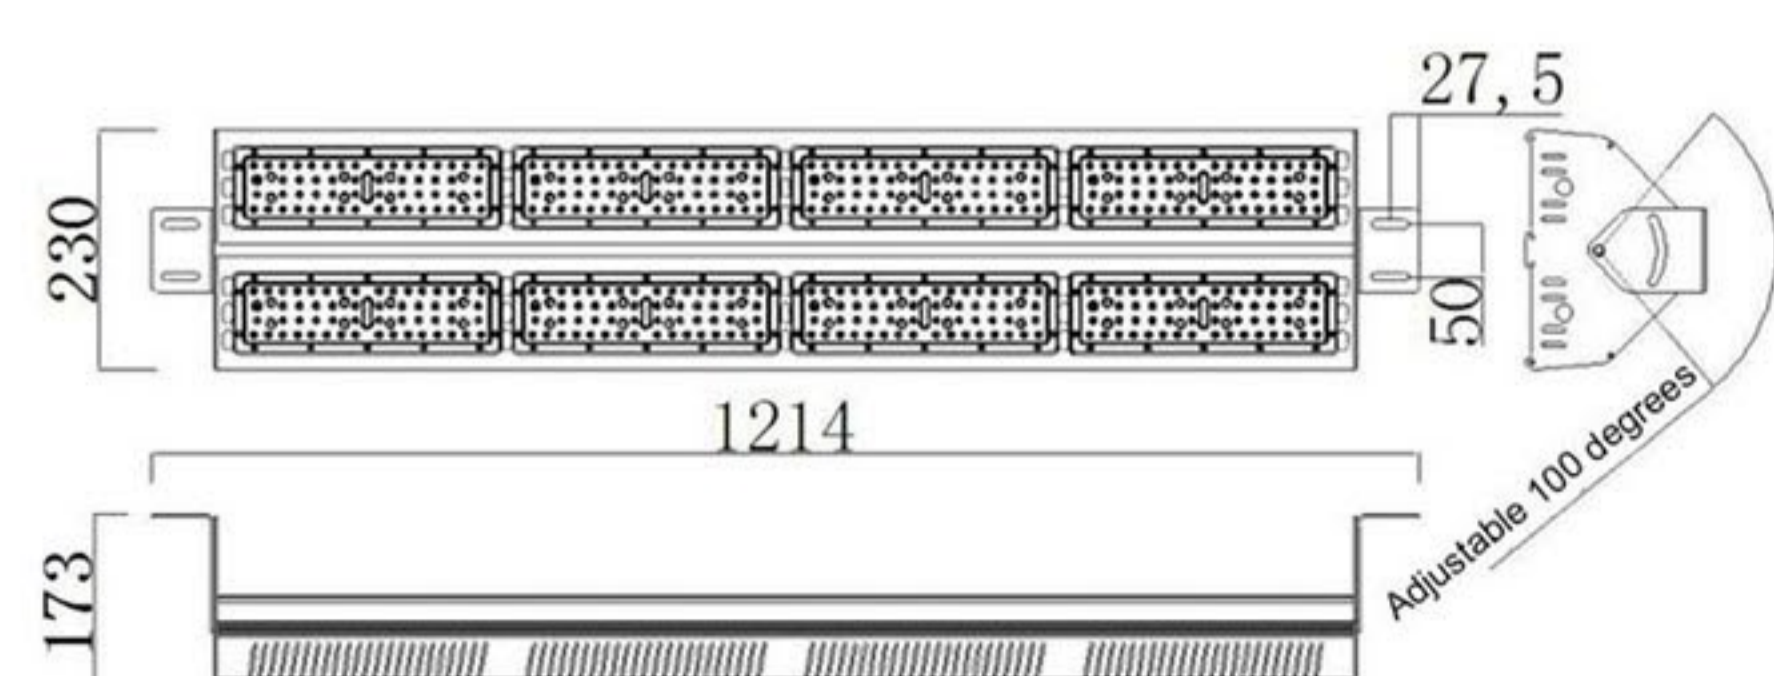

BST448Z-F14A

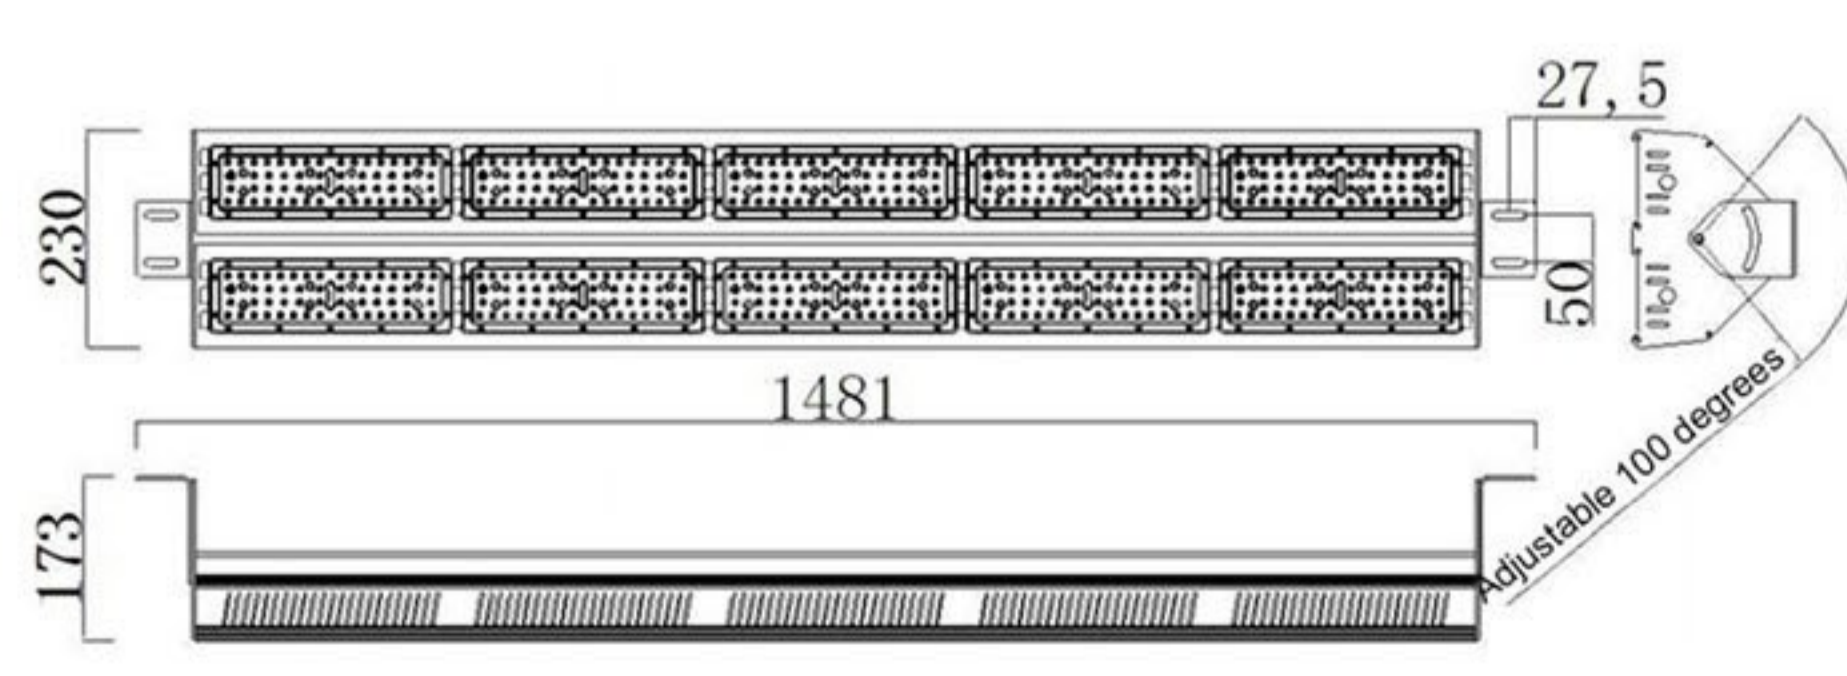


BST560Z-F14A



Application Scenes

General lighting for factory workshop, gas station, indoor stadium, exhibition hall, train station waiting room, library, logistics warehouse, cold storage, tunnel, bridge's aperture, culvert.

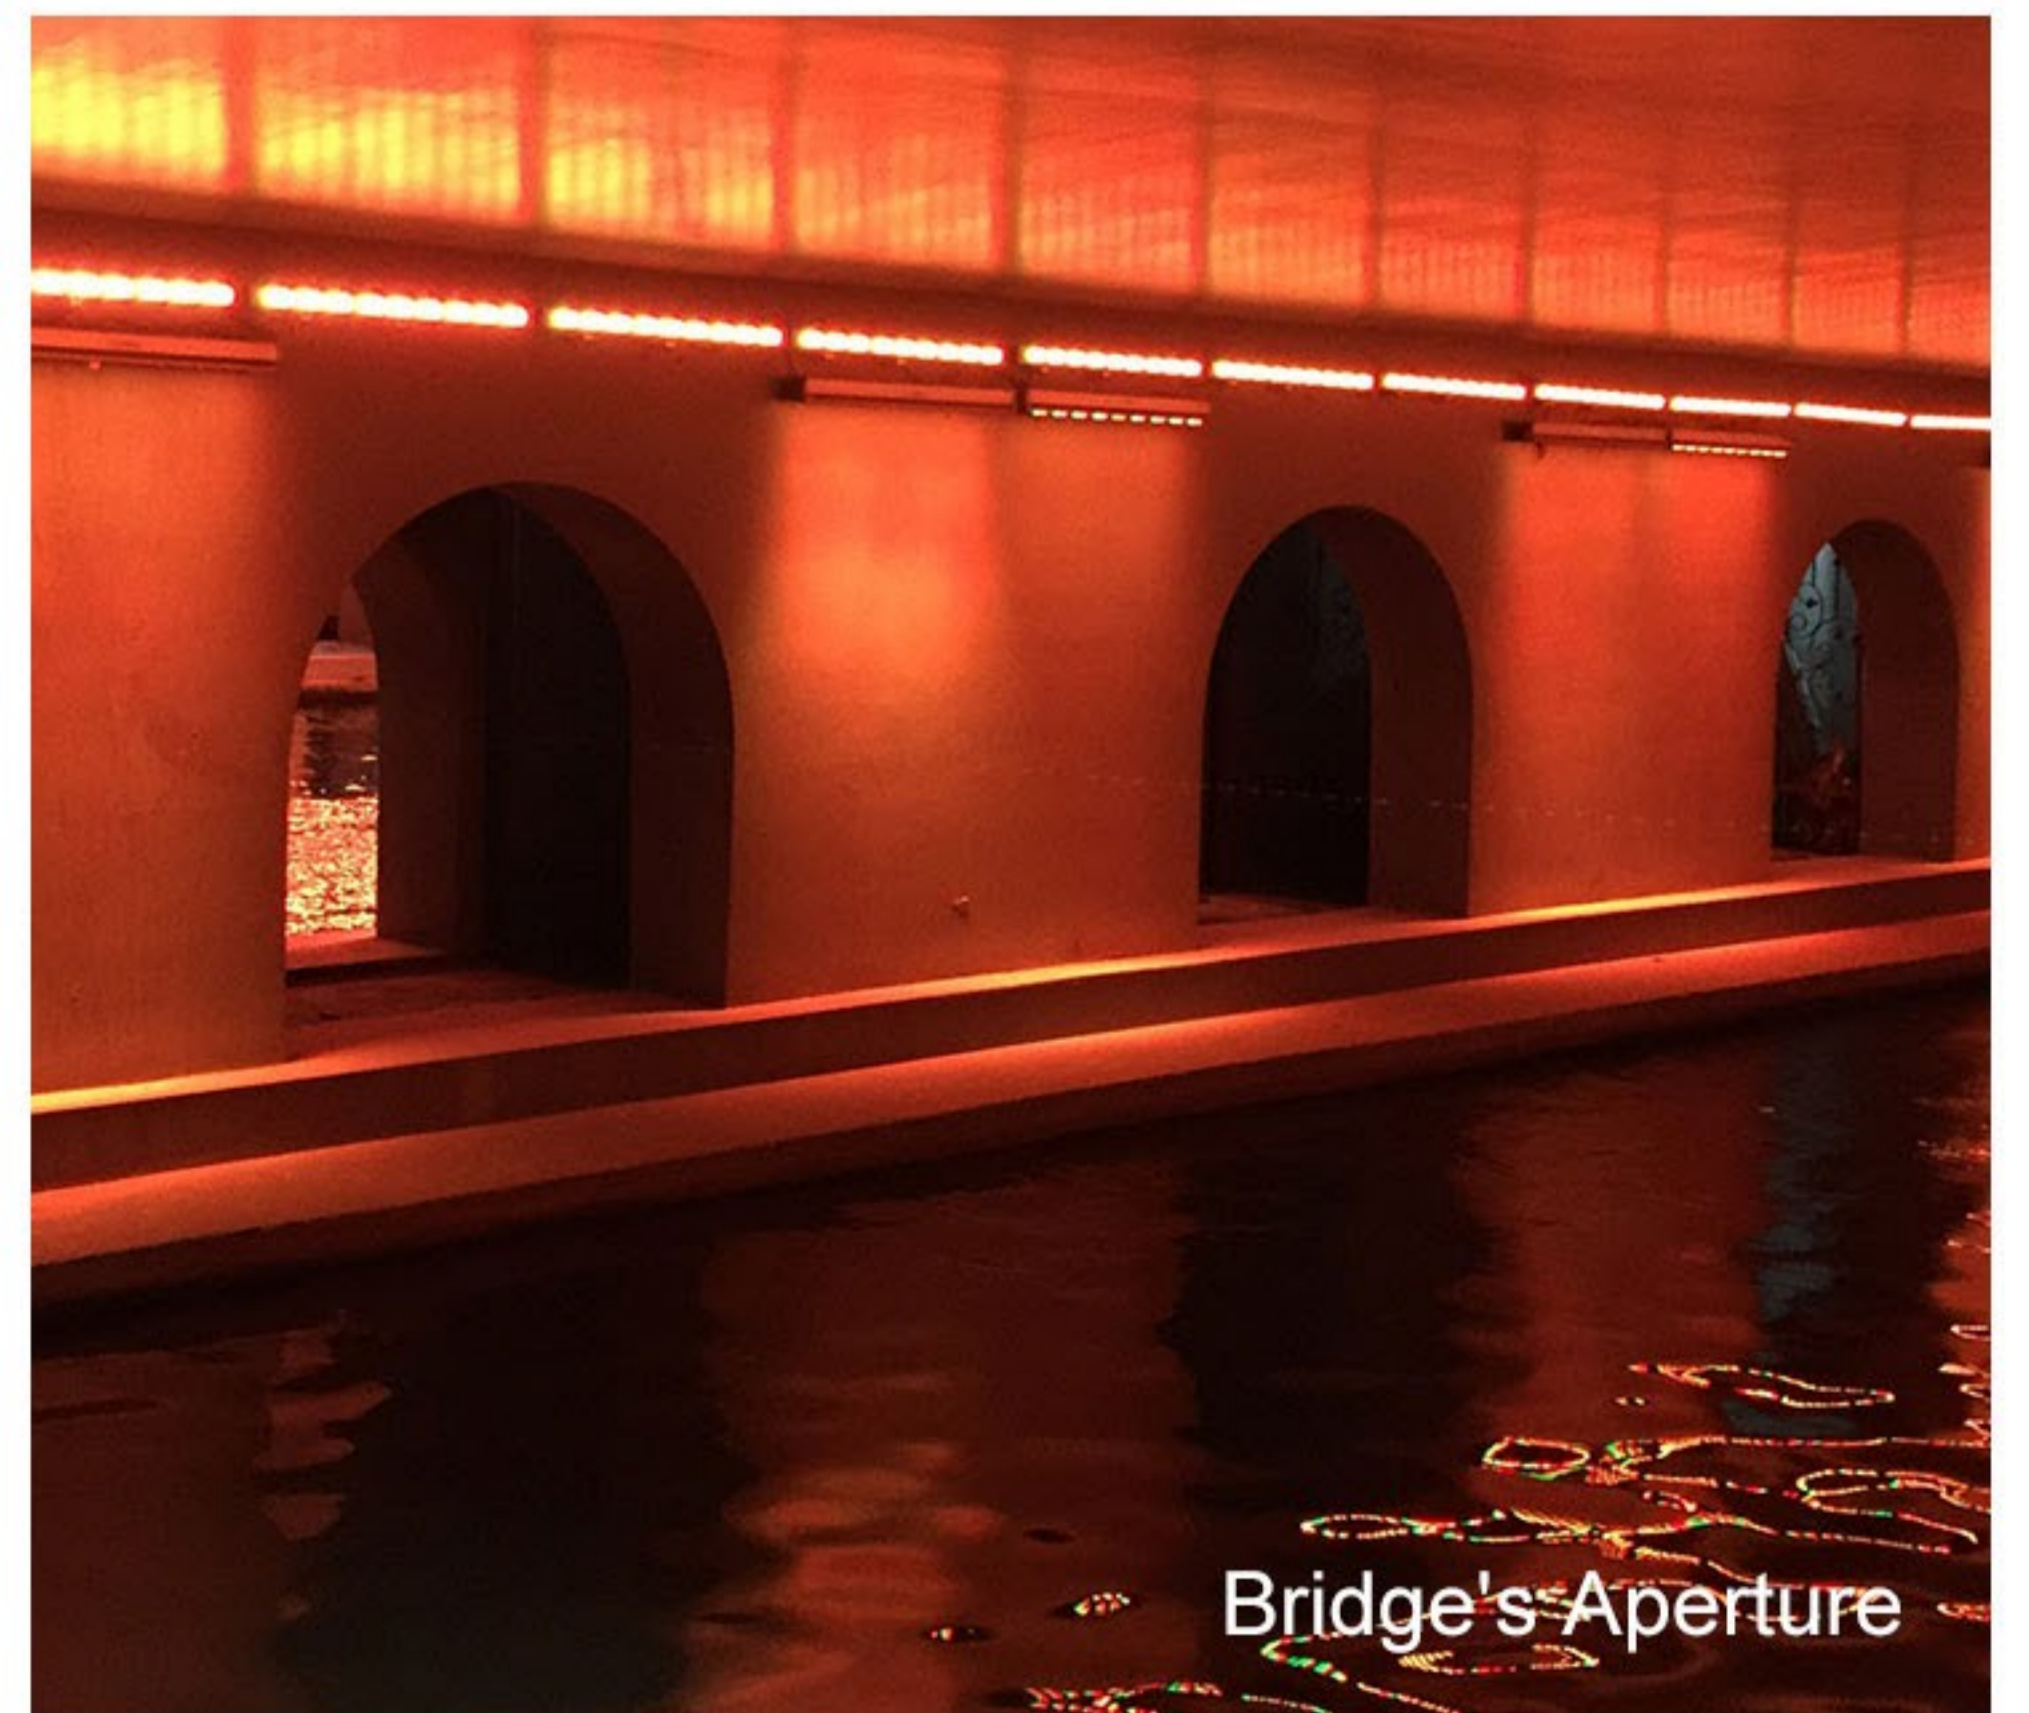

Zhejiang Boshang Optoelectronic Co.,Ltd.

Add:Hezhuang Industrial Zone,Xiaoshan District, Hangzhou City,Zhejiang Province,China.

